

VT 334 FWSD CU *control unit* brochure



VT 334 FWSD CU control unit

Compact control unit with integrated Full-HD monitor in a robust PeliCase (optional video enhancement system)

Applications

- ▶ Perfectly suitable for the operation of the camera series VT 34 PT and the crawler VT 34 MFW
- ▶ Camera, crawler and video recording functions are controlled via the control panel on the control unit
- ▶ The integrated high-resolution LCD monitor displays the camera image

Features



- ▶ Additional external devices can be connected to the HDMI video output of the control unit
- ▶ High-end SD card-based video recorder
- ▶ The control unit is well protected in the robust "Peli Storm" case
- ▶ Optional video overlay text inserter for documentation

Technical specifications - VT 334 FWSD CU control unit

This document is for general information only, please consult the system manual for detailed specifications


Housing	pelicase
Dimension	50x40x19.5 cm
Weight	10 kg
Video output	HDMI
Connections	camera
Power consumption	158.4 W
Input voltage	85-264 V AC / 47-63 Hz
Operating temperature	---
Recording	blackmagic video assist 5" 3G
Monitor	15"
Resolution	1024x768
Brightness	300 cd/m2
Contrast	20,000,000:1 (DCR)
Reaction time	5 ms
Optional	---
Features	---

* unit in mm

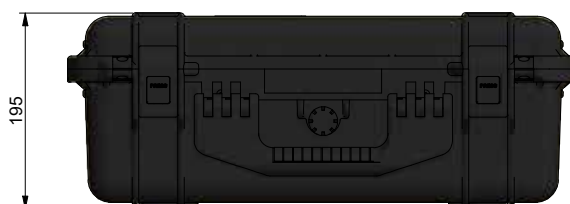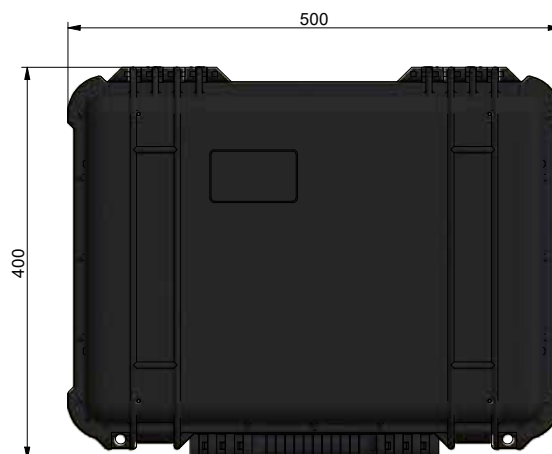

Setup

Possible combinations

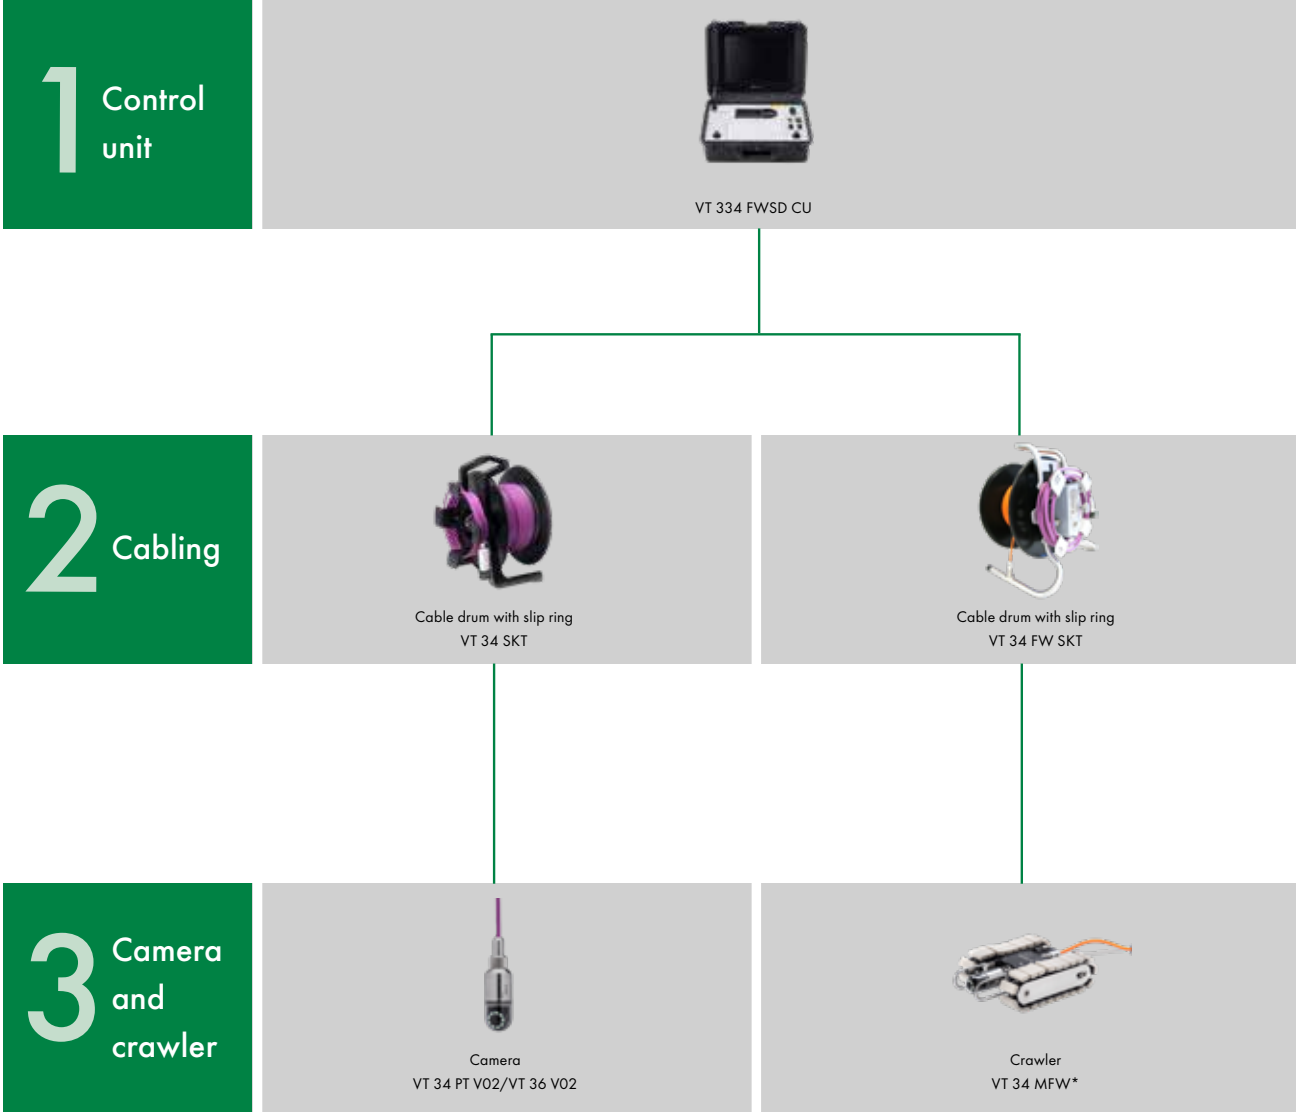

*extra power & joystick amplifier required in the control unit

Overview



VT 334 FWSD CU open, control panel



VT 334 FWSD CU Monitor



VT 334 FWSD CU Open

Optional



VT KV 1214 text inserter

Video insertion system for text and information display-
documentation for video inspections and monitoring applications
(CVBS/SD)

DEKRA Visatec GmbH

Gewerbepark 7, 87477 Sulzberg/See
Germany
Tel. + 49.8376.9215 0
info.dvg@dekra.com

www.dekra-visatec.com

