

# VT CamCtrl *control unit* brochure



## VT CamCtrl control unit for DEKRA VT cameras

DIN rail 35 mm compatible and modular control unit to control camera functions

### Applications

- ▶ Intended for the control of Dekra visatecs cameras


### Features

- ▶ Operation of the camera functions
- ▶ Small and compact dimensions
- ▶ Modular design
- ▶ DIN rail 35 mm compatible

## Technical specifications - VT CamCtrl control unit


This document is for general information only, please consult the system manual for detailed specifications

Housing	robust polyethylene
Dimension	50x110x110 mm
Weight	0.28 kg
Video output	coax or twisted pair (balanced)
Connections	screw terminals
Power consumption	48 W
Input voltage	24-33 V DC / with least 2.5 A
Operating temperature	0-40 °C
Recording	n/a
Monitor	n/a
Resolution	---
Brightness	---
Contrast	---
Reaction time	---
Optional	---
Features	---

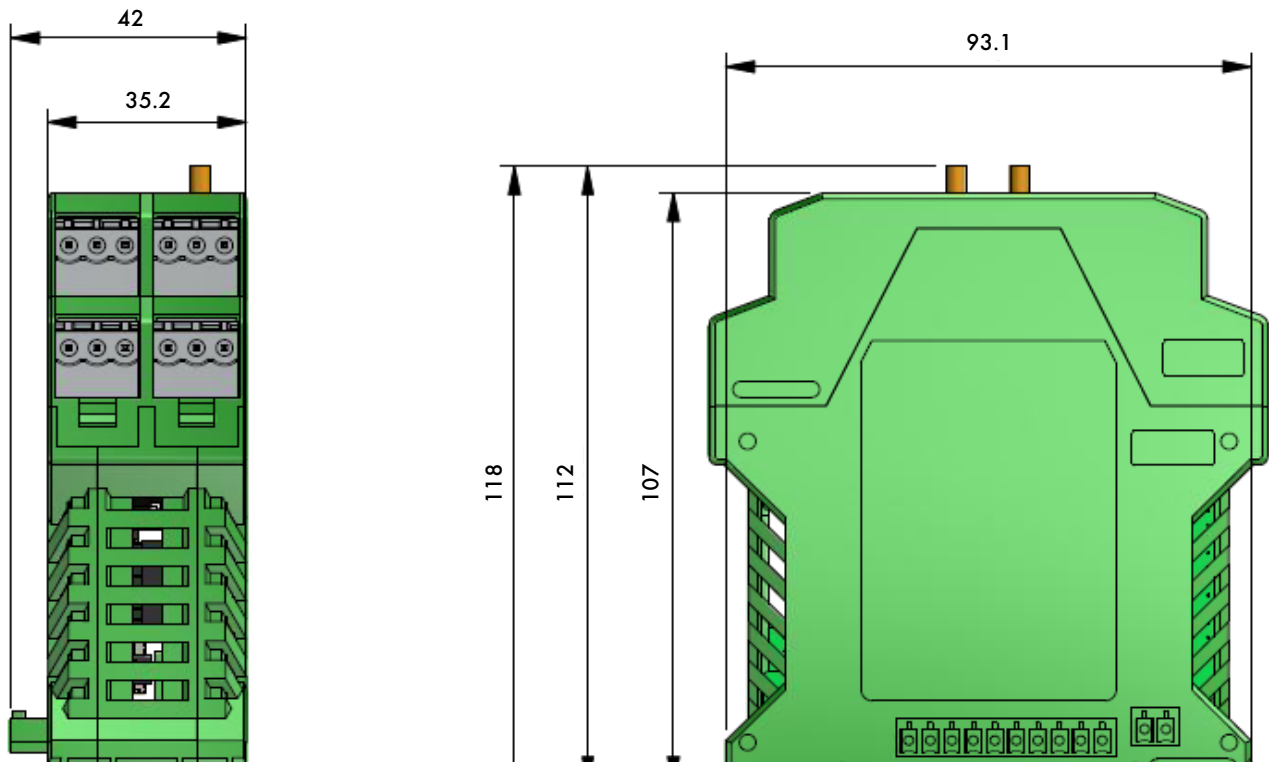

# Setup

## Possible combinations

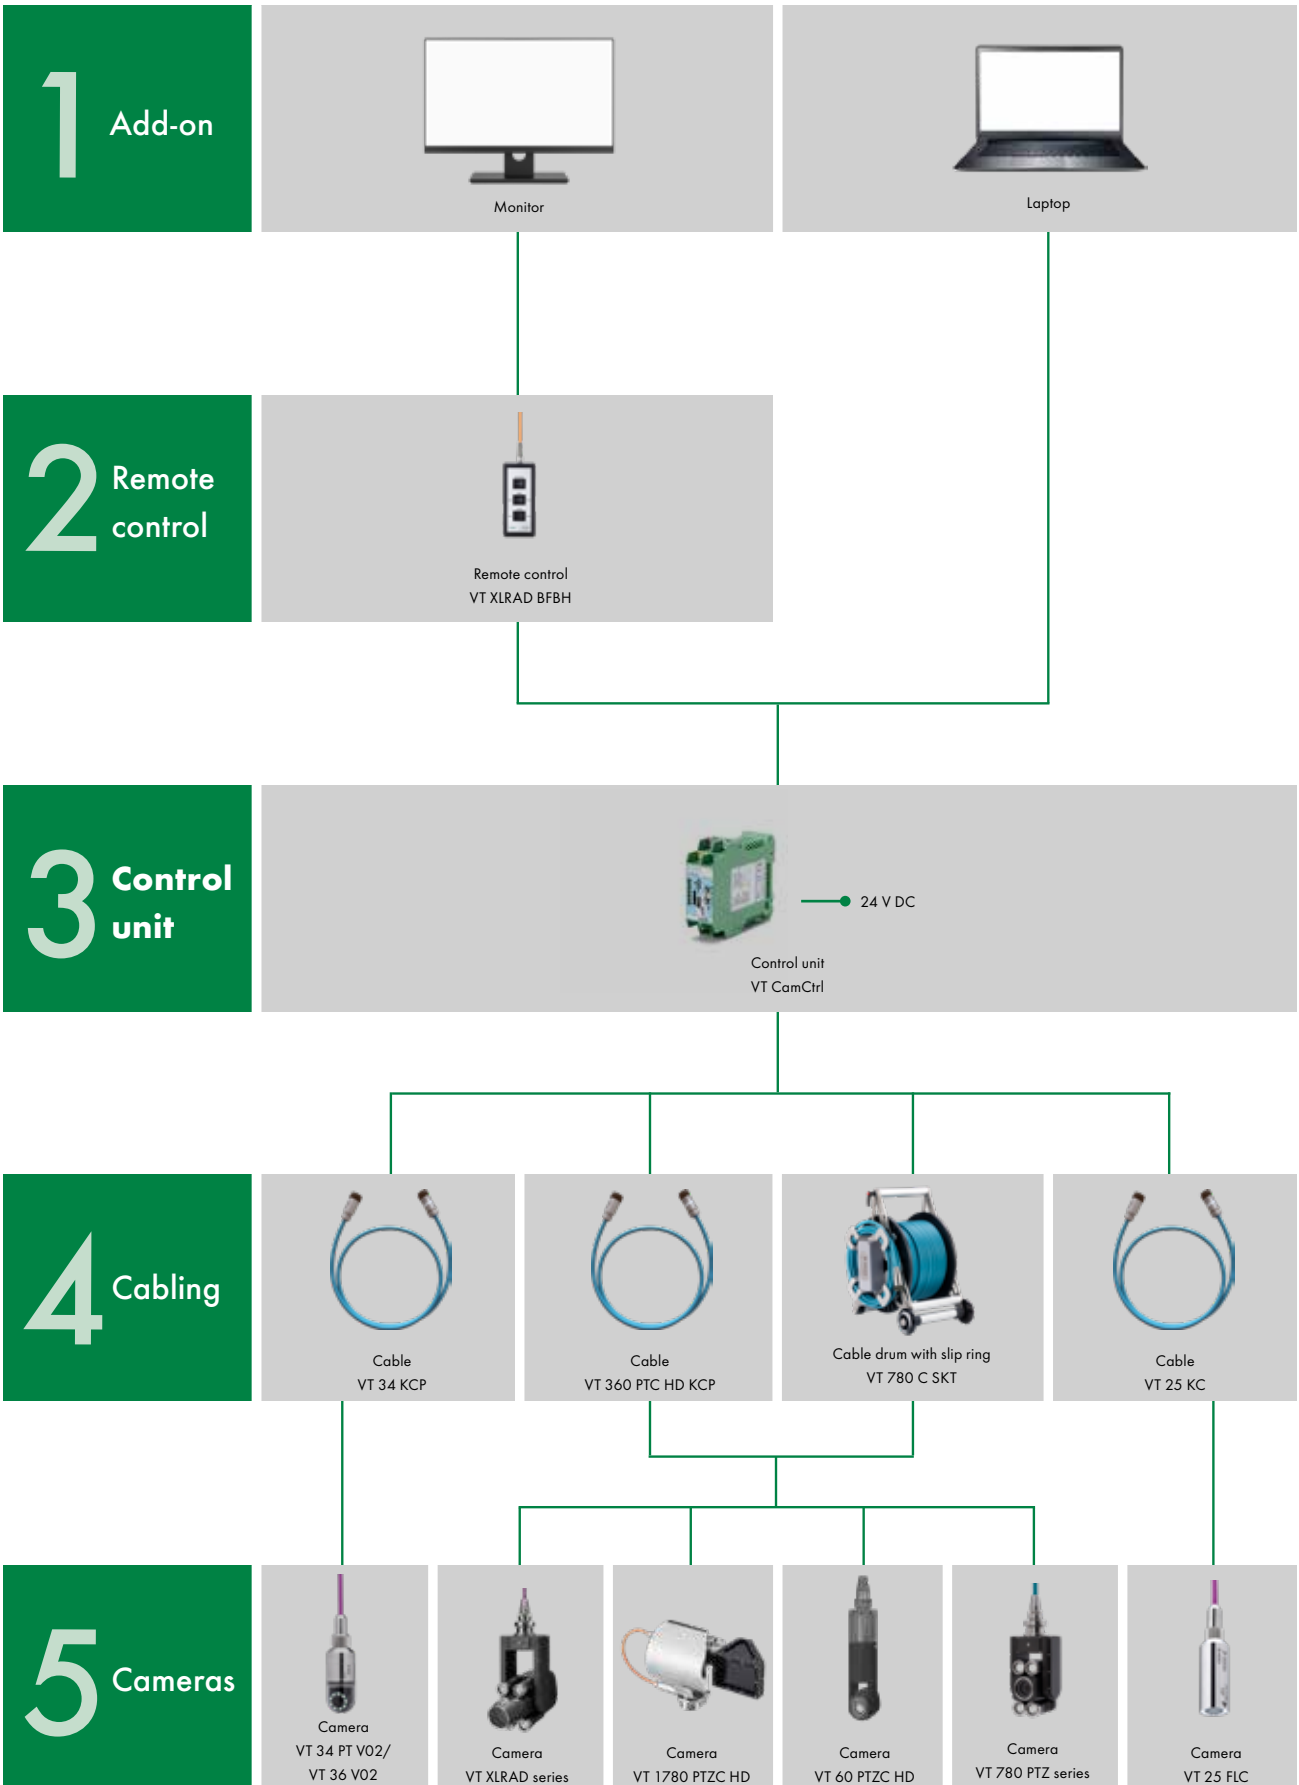

## Overview



VT CamCtrl front view



VT CamCtrl back view



VT CamCtrl side view



VT CamCtrl side view

**DEKRA Visatec GmbH**  
Gewerbepark 7, 87477 Sulzberg/See  
Germany  
Tel. + 49.8376.9215 0  
info.dvg@dekra.com

[www.dekra-visatec.com](http://www.dekra-visatec.com)

